VBA 10A-02GN

Boost ratio	2times
Set pressure gauge range	0.2-1.6MPA
Maximum flow rate	230L/MIN
Connection diameter	RC1/4(IN/OUT/EXH 3place)
Pressure gauge connection diameter	RC1/8(IN/OUT 2place)

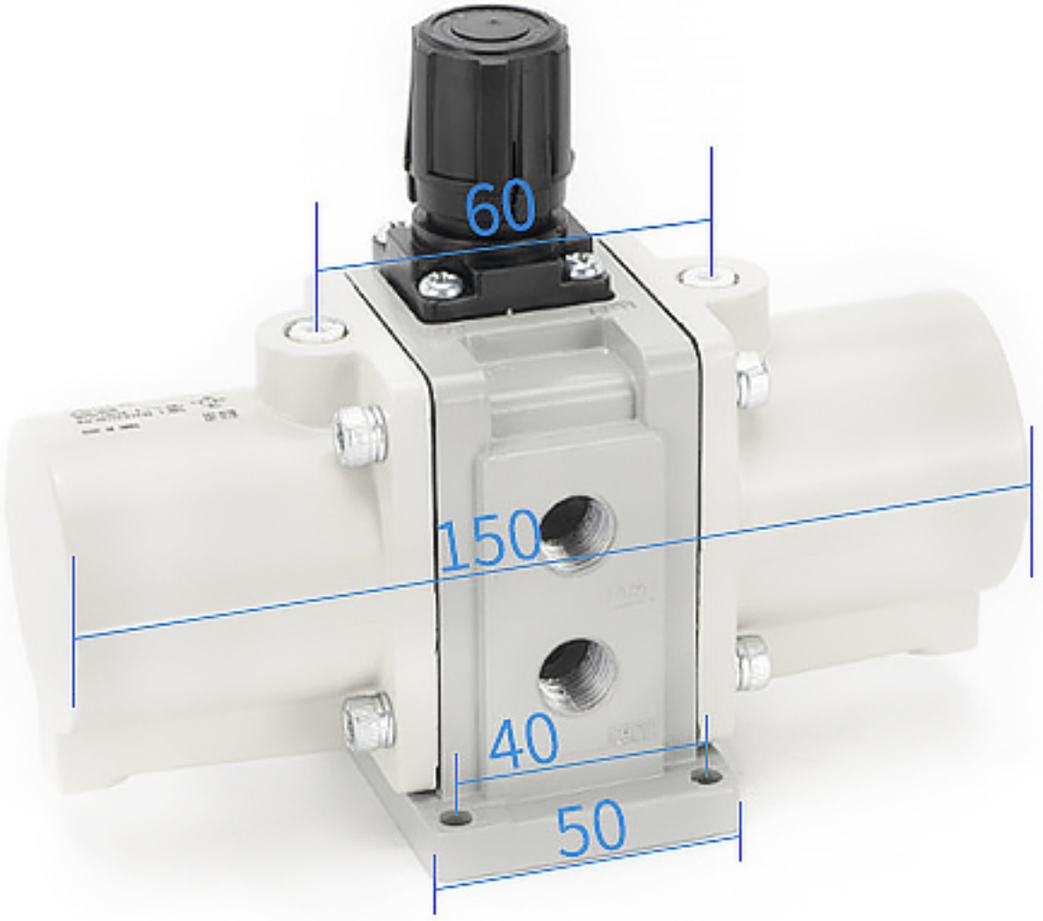

Equipped with pressure gauge and muffler

VBA 20A-03GN	
Boost ratio	2times
Set pressure gauge range	0.2-1.0MPA
Maximum flow rate	1000L/MIN
Connection diameter	RC3/8(IN/OUT/EXH 3place)
Pressure gauge connection diameter	RC1/8(IN/OUT 2place)

Equipped with pressure gauge and muffler

VBA 40A-04GN

Boost ratio	2times
Set pressure gauge range	0.2-1.0MPA
Maximum flow rate	1900L/MIN
Connection diameter	RC1/2(IN/OUT/EXH 3place)
Pressure gauge connection diameter	RC1/8(IN/OUT 2place)

Equipped with pressure gauge and muffler

VBA 22A-03	
Boost ratio	2times
Set pressure gauge range	0.2-1.0MPA
Maximum flow rate	1000L/MIN
Connection diameter	RC3/8(IN/OUT/EXH 3place)
Pressure gauge connection diameter	RC1/8(IN/OUT 2place)

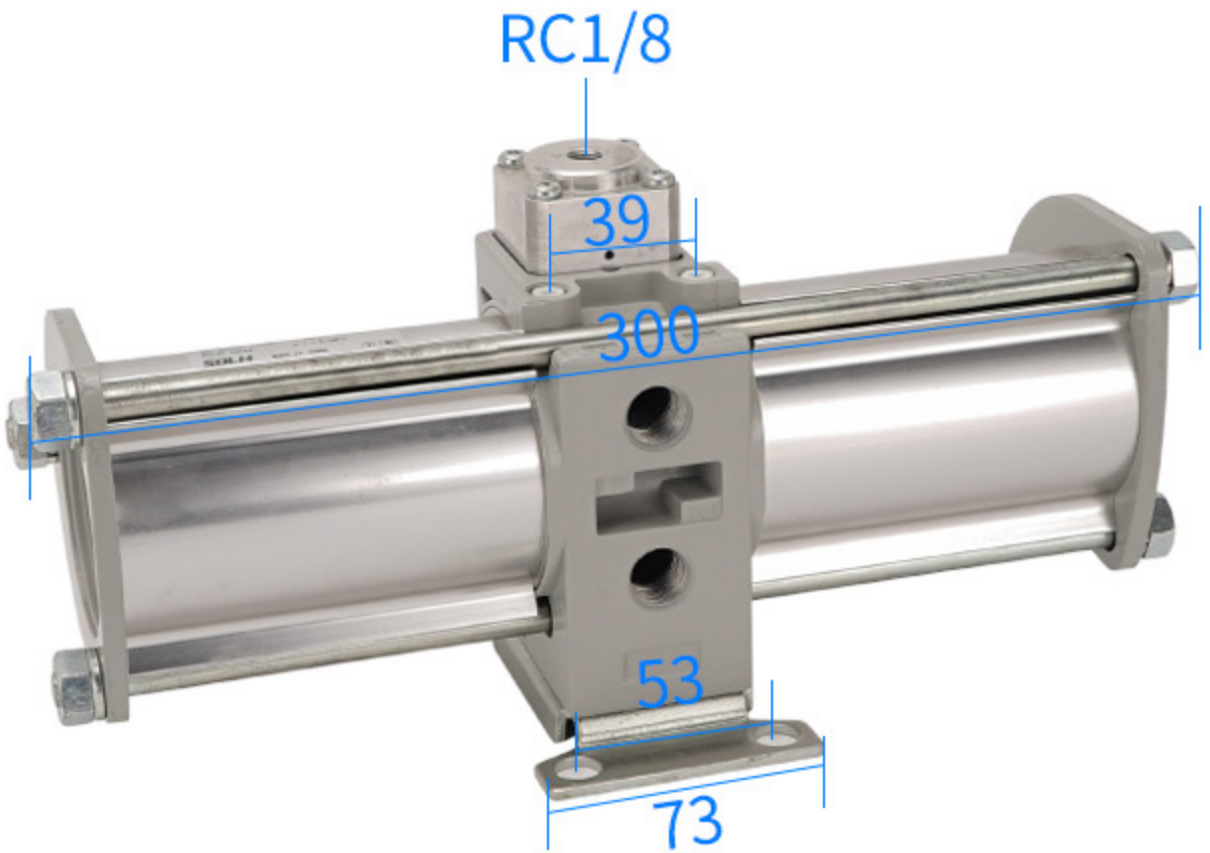

No accessories

VBA 42A-04	
Boost ratio	2times
Set pressure gauge range	0.2-1.0MPA
Maximum flow rate	1900L/MIN
Connection diameter	RC1/2(IN/OUT/EXH 3place)
Pressure gauge connection diameter	RC1/8(IN/OUT 2place)

No accessories

VBA 43A-04

Boost ratio	2times
Set pressure gauge range	0.2-1.6MPA
Maximum flow rate	1600L/MIN
Connection diameter	RC1/2(IN/OUT/EXH 3place)
Pressure gauge connection diameter	RC1/8(IN/OUT 2place)

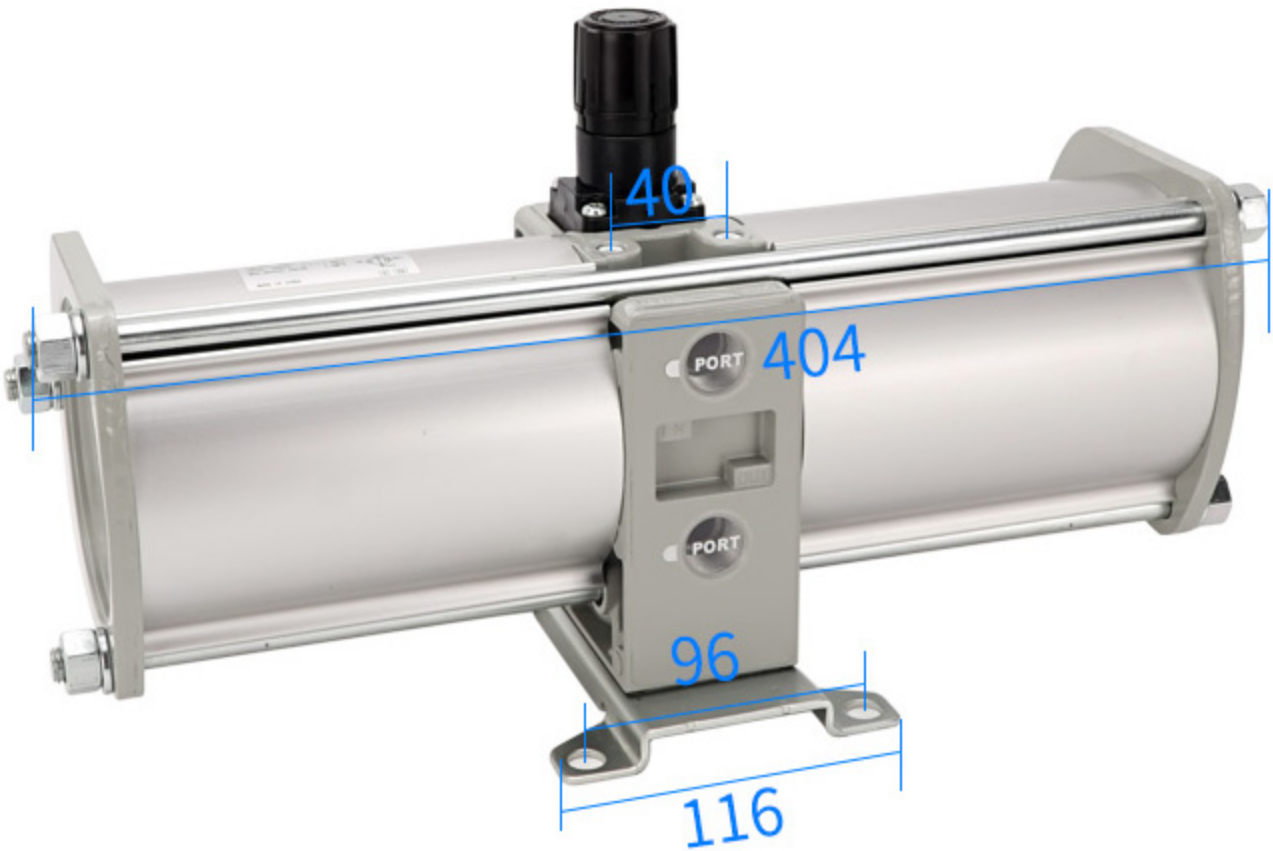

No accessories

VBA 11A-02GN

Boost ratio	2times-4times
Set pressure gauge range	0.2-2.0MPA
Maximum flow rate	70L/MIN
Connection diameter	RC1/4(IN/OUT/EXH 3place)
Pressure gauge connection diameter	RC1/8(IN/OUT 2place)

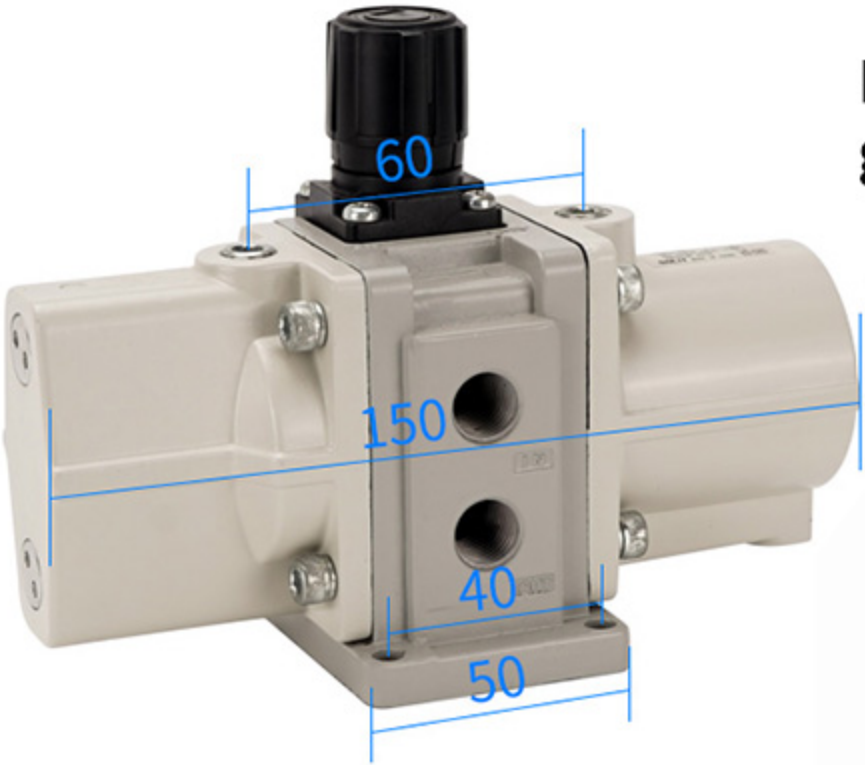

Equipped with pressure gauge and muffler